



38' 6" MVT STANDARD SPECIFICATIONS


- 68" sides for increased capacity
- Ground clearance of 25" – great for ag use and swing-away augers
- Hoppers are .125" thick material with vertical stiffeners
- White aluminum .063" baked enamel finish
- Corrosion resistant mylar barrier separates all aluminum from contact with steel
- Merritor Wabco premium ABS 4S-2M
- Sealed wiring harness with internal grounding
- Two rows of three lights per side
- 22,500# axles, 5" round with automatic slack adjusters
- Single leaf springs (Hendrickson *Intraax* air ride available)
- Choice of wheels, tires and sizes
- *Shur-Lok* roll-over tarp

Dimensions:

38' 6" MVT

Length:	38' 6"
Width:	96"
Side Wall Height:	68"
Number of Hoppers:	2
Hopper Clearance Empty:	25"
Cubic Capacity (Heaped):	1,323
Heaped Bushels – (Approximate):	1,053
Swing Clearance:	115 ¹³ / ₁₆ "
King Pin Setting:	18"
Hopper Slope – side:	40°
Upper Slope:	33 ¹ / ₂ °
Estimated Weight:	8,600 lbs.*

* With eight 10-hole, 8.25 X 24.5 uni-mounted steel wheels, and tires.

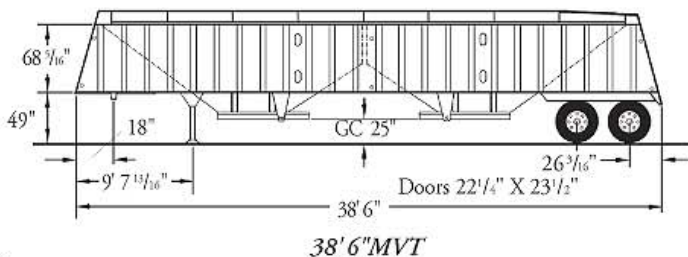

Your Local Merritt Dealer:



Merritt's FLO-THRU, lap-seamed corners allow the product to funnel out cleanly and completely every load. No cross bracing inside. New, stronger top rail.



Large Sight Windows, optional, 4 per side positioned above doors.



The incline allows the driver to lean into the trailer while standing on the platform.



Corrosion-resistant rear butt plate. Lighter. Brighter. No repainting required.

Disclaimer Statement: Merritt Equipment Co. reserves the right to make changes in materials, components, designs, equipment specifications and trailer models without notice. All visual specifications, representations, volumes and dimension references are based on the latest product offerings and are approximations available at the time of this publication. At no time will the information contained within this publication be used as the basis for resolving disputes.